

MAXIMUM SAFETY AND CONTROL

At 50% More Lifting Power

The new Holmatro 12 bar lifting bags offer a 50% higher performance. They come with a completely redesigned control unit, allowing you to apply this increased power in a safe and controlled way. All developed with a strong focus on ease of use.



DESIGNED AROUND YOU

It's often the small details that make a difference. An integrated carrying handle to easily pick up your lifting bag. A simple arrow for a quick visual indication of the lifting height. An extra gauge on the control unit to keep an eye on the incoming air pressure. Discover all the smart features of the new Holmatro lifting bag range!



UAB "Iskada"
Generalinis direktorius
Broniaus Danilevičius
Tel. +370 6 2842837



Optimized non-slip design

Aramid-reinforced, 4:1 safety

Reflective markings

Model number imprinted

Air inlet at a right angle

Integrated dust cap

Lifting capacity indication

Chamfered edges

IMPORTANT INFORMATION LABELS

Clear indication of safety warnings, technical specifications and lifting height. Data matrix for equipment management in the free Holmatro Service Portal.

CENTER MARKINGS AND INTERLOCKING PROFILE

To help you position a smaller bag onto a larger model. The interlocking profile maximizes the contact area and stability of inflated lifting bags.

STANDARD SLIDER PADS

For easy insertion underneath an object.

INTEGRATED CARRYING HANDLE

Makes it easier to pull your lifting bag from the truck and take it with you.

INSERTS FOR OPTIONAL LIFTING EYES

To attach a rope for easy maneuvering of your lifting bag.

Lifting Bag HLB 33



LED-illuminated Lightweight

AIR SOURCE PRESSURE GAUGE

Easy checking of incoming air pressure. Allows for timely air source replacement.

SAFETY COUPLER (ALSO ON HOSES)

Unlocks in two steps for improved safety: pressure release before hose disconnection.

CARRYING BAR

For easy carrying. Protects against damage and prevents accidental operation when the control is upside down.

INTUITIVE BUTTON OPERATION

Precise air flow regulation for controlled and safe lifting.

NON-RETURN VALVES

Independent controlled lifting: no risk of air pressure shifting from one bag to the other.

Control Unit HDC 12




WATCH THE VIDEO ON
HOLMATRO.COM/
EN/LIFTING-BAGS

FULL RANGE AVAILABLE

Choose your lifting bag: with a 50% increase in power you can get the same job done using a smaller and lighter model.



UAB "Iskada"
 Generalinis direktorius
 Ernestas Banikavičius
 Tel. +370 6 2842837

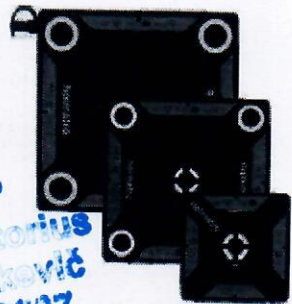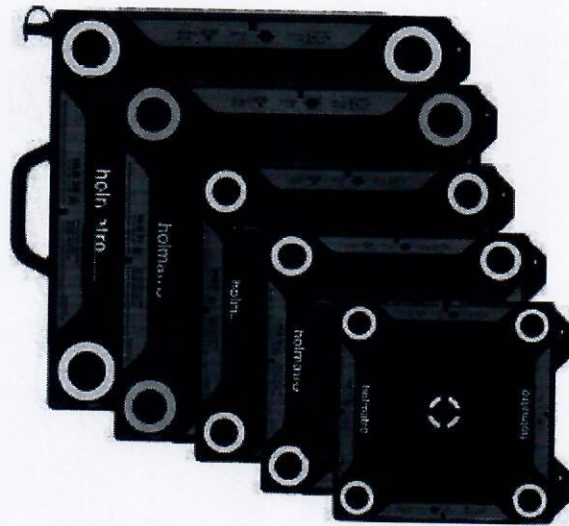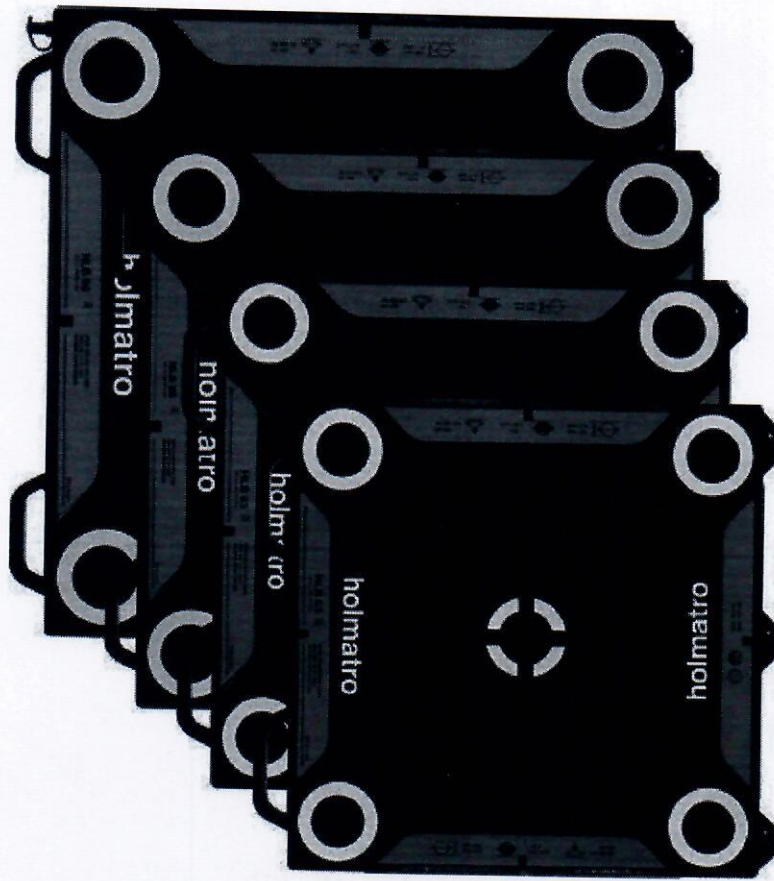

SMALL HLB 2 HLB 6 HLB 8

MEDIUM HLB 11 HLB 16 HLB 21 HLB 31 HLB 38

LARGE

HLB 53 HLB 63 HLB 85 HLB 96

Two handles. Three slider pads.

One grip. Two slider pads.

Lifting bags max. working pressure 12 bar	HLB 2	HLB 6	HLB 8	HLB 11	HLB 16	HLB 21	HLB 31	HLB 38	HLB 53	HLB 63	HLB 85	HLB 96
Article number	350.321.021	350.321.022	350.321.023	350.321.025	350.321.026	350.321.027	350.321.028		350.321.031	350.321.032	350.321.034	350.321.033
Max. effective lifting force	kN/t	55 / 5,6	82 / 8,4	110 / 11,2	155 / 15,8	210 / 21,4	306 / 31,2		520 / 53	620 / 63,2	855 / 87,2	940 / 95,9
Max. inflation height	mm	94	141	207	236	256	321		411	456	550	565
Dimensions (L x W x H)	mm	200 x 160 x 22	285 x 245 x 22	335 x 295 x 22	403 x 325 x 25	467 x 390 x 25	517 x 440 x 25	608 x 530 x 27	767 x 690 x 27	827 x 750 x 27	948 x 870 x 27	987 x 910 x 27
Weight	kg	0,7	1,6	3,2	4,5	5,6	8,6		15	17	23	25

MAKSIMALUS SAUGUMAS IR KONTROLĖ

50% didesnė keliamoji galia

Naujieji Holmatro 12 bar kėlimo maišai suteikia 50% didesnę našumą. Jie yra pateikiami su visiškai perdurtu valdymo skydeliu, kuris jums leidžia padidinti galią saugiu ir valdomu būdu. Įrenginys yra suprojektuotas dirbti saugiai ir lengvai naudojimą.



Oro įvestis dešiniajame kampe.
 Integruotas gaubtelis nuo dulkių

Keliamosios galios indikatorius
 Nukirpti kraštai

izuotas neslidus dizainas
 lūdų sustiprinta, 4.1 "sauga"
 Atspindinčios žymės

holmatro

CENTRINIAI ŽYMĖ

UAB "Iskada"
gamtinis direktorius
Miroslav Banjuković
T. +370 5 2642837

Leidžia jums uždėti mažesnę maišą ant didesnio modelio. Sukabinimo profilis padidina kėlimo maišo kontaktinę sritį.



Palengvina jūsų kelimo mašos
ištraukimą iš sunkvežimio.

**VIETOS
PASIRENKAMOMIS
KĖLIMO KILPOMS**
Virvės pritvirtinimui ir kėlimo
maišo manevravimui.

VIENAKRYPČIAI VOŽTUVAI
Nepriklausomai valdomas kėlimas:
viena oro slėgio kameros rizikos iš vienos
maišo į kitą.

GALIMYBĖ PASIRINKTI IŠ PILNO ASORTIMENTO

Pasirinkite savo kėlimo maišą: su 50% padidinta galia galite atlikti tą patį darbą naudodami mažesnius ir lengvesnius modelius.

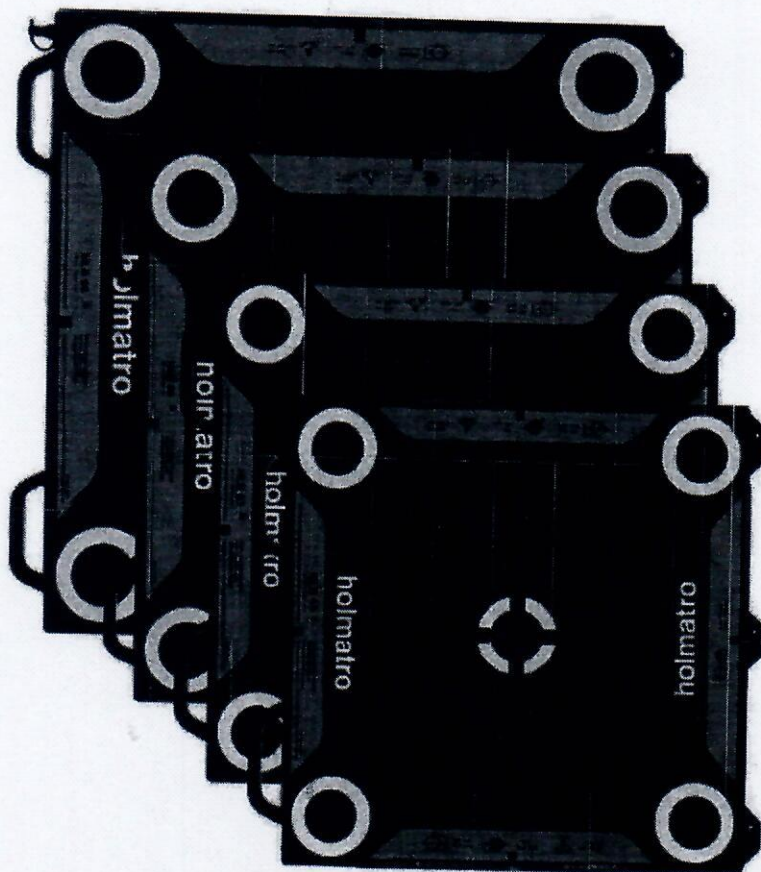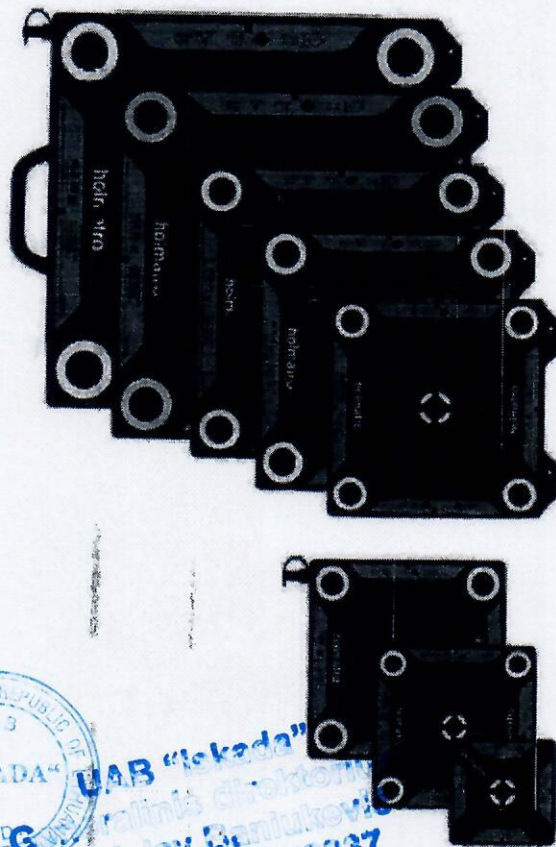

MAŽAS HLB2 HLB6 HLB8

Kēlino mālīši	HLB 2	350 02 0	94	200 x 160	
Dzīvausis dabūjis slēpīs 12 bar		21 72 1	94	200 x 160	
Prostis Nr.					
Dzīvausis araugšvairoga			mm		
Dzīvausis priekšino aukstis			mm		
Išmērvaimi (x p x A)			mm		
Svars			kg	0,7	

DIDELIS

	HLB 53	HLB 63	HLB 85
350 x 320 x 301	350 x 321 x 322	340 x 324 x 346	
528 x 53	520 x 53 x 2	355 x 51 x 2	
411	456	550	
767 x 690 x 21	827 x 750 x 27	948 x 870 x 27	
15	17	23	

Vertimas iš anglų kalbos į lietuvių kalbą yra teisingas ir atitinka pateiktą dokumentą.
Vertė Vilniaus vertimų biuro "Oltena" vertėjas Miroslav Rusakevič
UAB "OLTENA" VERTIMŲ BIURAS
A. Goštauto g. 8-269, Vilnius, Lietuva
www.vertimai24.lt



UAB "Iskada"
Generalinis direktorius
Borislay Baniukovsk
Tel. +370 6 2642337