



# Digital Camera & Image Filing Software TD-10 / EyeCAM

S e r v i n g   y o u r   v i s i o n




Skaitmeninė kamera ir vaizdo įrašymo programinė įranga  
TD-10 / EyeCAM

Digital Camera & Image Filing Software

# TD-10 / EyeCAM

User-friendly ultra-high resolution digital imaging system with USB 3.0 connection and DICOM compatibility, realized with simple operation in combination with TD-10 digital camera and EyeCAM image & video filing software

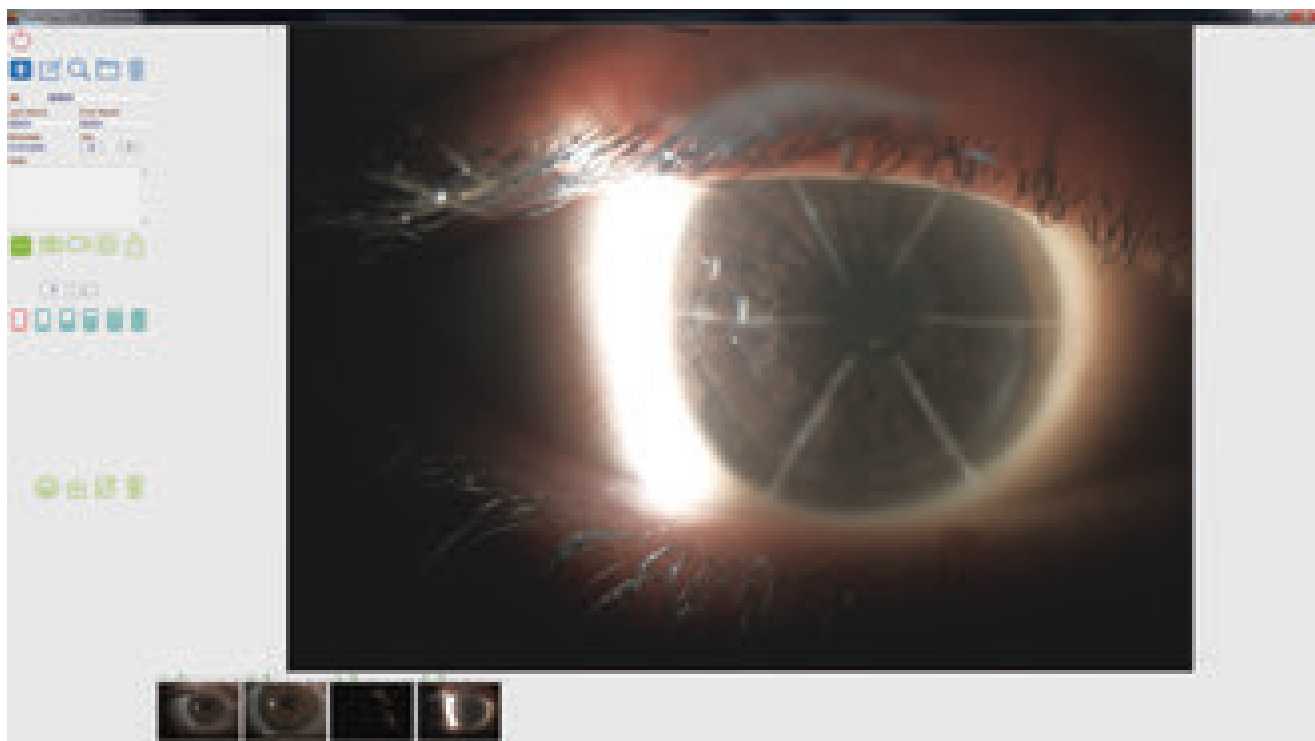

The captured image is created by inlay.

Ultra didelės skiriamosios gebos 10,7 megapikselių kameros naudojimas

## 2.2. Use of Ultra High Resolution 10.7 Mega Pixel Camera

- 2.3. Use of Ultra High Resolution 10.7 Mega Pixel Camera with 3856 x 2764 picture size, delivering 7.4 times higher-resolution compared to the previous digital camera of TD-1plus.

Ultra didelės skiriamosios gebos 10,7 megapikselių fotoaparato naudojimas su 3856 x 2764 nuotraukų dydžiu, suteikiantis 7,4 karto didesnę skiriamąją gebą, palyginti su ankstesne skaitmenine TD-1plus kamera.

## 2.4. USB 3.0 Connection Interface USB 3.0 ryšio sąsaja

By changing to the new USB 3.0 interface, data transfer speed is now approximately 6.4 times faster than that of the previous IEEE1394b fire-wire interface. Stress-free high-resolution live images are made possible.

Naudotojui patogią programinę įrangą su DICOM suderinamumu

## 2.8. User Friendly Software with DICOM Compatibility

User friendly software with patient database, full image editing facility, and DICOM compatibility.

Patogią programinę įrangą su pacientų duomenų baze, pilno vaizdo redagavimo galimybe ir DICOM suderinamumu.

1


### Neat Digital Imaging System with hidden cables

In combination with our LED slit lamps minimum cables for TD-10 are exposed as they can be quickly and neatly concealed in the slit lamp's arm.

2

### Yellow Filter Built in as Standard

High-contrast images are easily obtained by using the built-in yellow filter for corneal fluorescein observation. In conjunction with our slit lamps cobalt blue filter even higher-contrast images can be achieved.

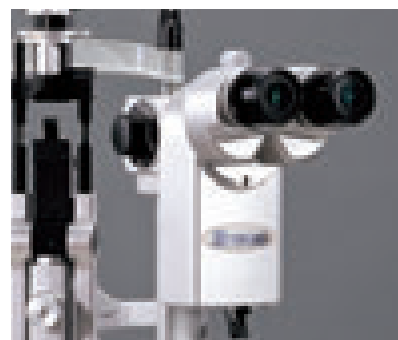

3

### 2.6. Capturing of Still Images with One Push

In combination with our supplied trigger cable, still images can be captured instantly and conveniently by pressing the joystick button of the slit lamp. Captured images can be displayed as thumbnail images in the lower part of the screen for evaluation.

Kartu su mūsų tiekiamu trigeriniu kabeliu vaizdus galima fotografuoti iškart ir patogiai, paspaudžiant plyšinės lempos vairasvirtės mygtuką.



4


### New EyeCAM Main Screen Design

The conventional image filing software & patient database have been further upgraded for more ease of use and intuitive handling by reviewing each icon while maintaining the convenient functionality.

5

### Easy Capture with Six Pre-stored Eye Settings

Setting of the digital camera can be changed and saved easily with six types of scene files according to the eye condition and image type required. Use our preserved recommended settings or simply adjust each pre-set to your own desired level for very fast and convenient high quality image acquisition.

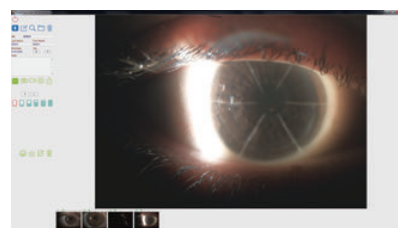


6

### 2.8. Convenient Comparison Functions for Follow-up Observations

Newly captured images and images taken in past examinations can be displayed on the same screen. Up to six images can be displayed and compared at once.

Naujai užfiksuoti vaizdai ir atvaizdai, gauti ankstesnių tyrimų metu, gali būti rodomi tame pačiame ekrane. Iki šešių vaizdų vienu metu gali būti rodomi ir palyginami.

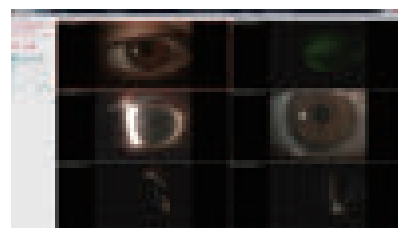



## Camera specifications


Picture size	3856 x 2764
Resolution depth	12 bit
Digital interface	USB 3.0
Frame Rate	7.3 fps Kameros kadryų dažnis
Electricity Consumption	Less than 4.5W

2.5.


## System Requirements

OS	Windows 7 & 8, 64bit (All Editions)
RAM	4GB or more recommended
Interface	USB 3.0
CPU	Intel i5 or superior CPU recommended

## Dimensions

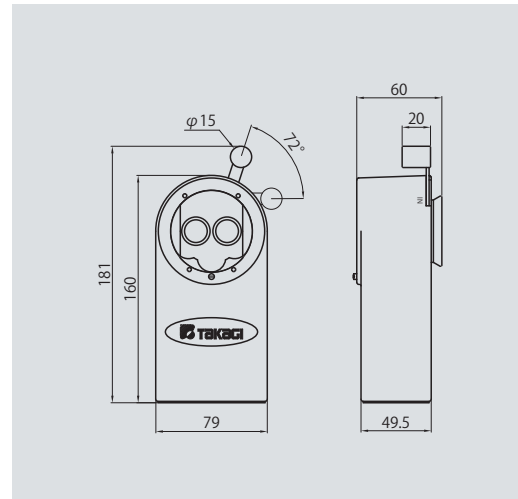


2.9.

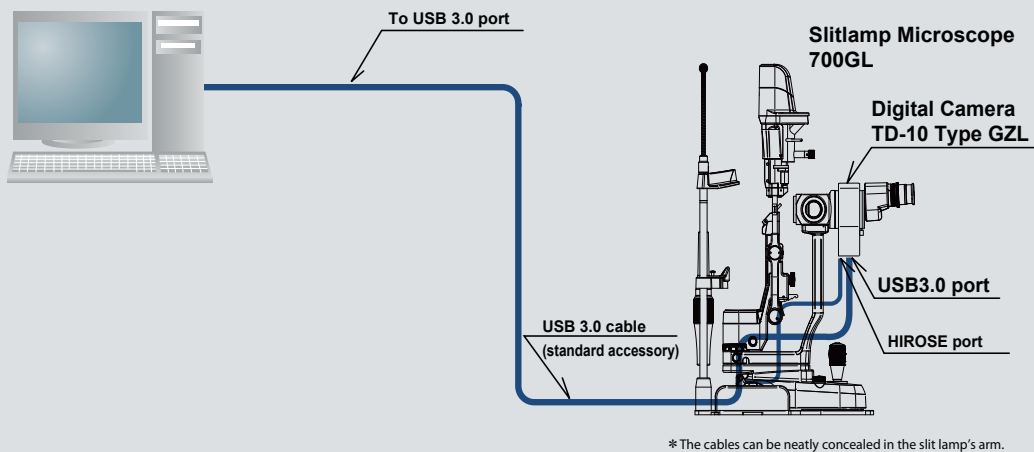

## Combination with background illumination system

In combination with our background illumination device, a more comprehensive explanation is made possible to the patient.

\* Back ground illumination built in as standard with 700GL and 4ZL models



Plyšinių lempų modeliai suderinami su TD-10 tipais

## 2.1. Slitlamp models compatible with TD-10 types

Compatible models	Type GZL	700GL, 2ZL, 4ZL
	Type XL	300XL

● Design and specifications are subject to change as improvements are made to the product.

**TAKAGI SEIKO CO.,LTD.**

330-2 IWAFFUNE, NAKANO-SHI, NAGANO-KEN, 383-8585, JAPAN  
TEL.+81-269-22-4512 FAX.+81-269-26-6321  
URL:<http://www.takagi-j.com> E-mail:[info@takagi-j.com](mailto:info@takagi-j.com)



B15003 Rev.0 Printed in Japan 2015.08 KY